



get work done!



www.primoglobal.com



Primo™ is a global brand for hydraulic and industrial hoses. Armed with a wealth of experience and knowledge of fluid conveyance industry-standard, materials, and practices, Primo has consolidated this experience to offer a wide range of products for the construction, heavy equipment, agricultural, food, transportation, marine, oil and gas industries. Primo products are manufactured employing advanced European technology and equipment. All products are inspected, tested and undergo stringent quality control, ensuring compliance with international standards.

Primo products include a complete range of hydraulic hoses, industrial hoses for the conveyance of air, water and oil, and hoses for pneumatic applications. Primo products are engineered to standards which meet optimal functional requirements whilst offering the most cost-effective solution to customers.

Never stop. Keep your wheels turning. Get work done with Primo!



Contents

Hydraulic Hoses

- 05 **UnoForza**
EN 853 SAE 100 R1AT
- 06 **DuoForza**
EN 853 SAE 100 R2AT
- 07 **QuattroSpir 4SP**
EN 856 SAE R9
- 08 **QuattroSpir 4SH**
EN 856 SAE R9
- 09 **UrOptimo**
EN 854 SAE 100 R6



Contents

Industrial Hoses

11	AquaForza Water Suction & Discharge Hose	17	Primo PVC Steel Wire Hose
12	AriaForza Air Hose	18	Primo PVC Fiber Reinforced Hose
13	OlioForza Oil Suction & Discharge Hose	19	Primo PVC Clear Hose
14	PrimaCor PVC Lay Flat Medium / Heavy Duty	20	Primo Nylon Hose
15	PrimeFlex PVC Suction Hose	21	Primo PU Hose
16	Primo PVC Garden Hose	22	Primo PU Coiled Hose





Hose Inner Diameter (ID)

Measured in 1/16 inch increments identified by use of a "dash"(-) numbering system. i.e., = "4/16" = "1/4".



Hose Outer Diameter (OD)

A critical measurement when considering hose clamps and applications where envelope size is limited.



Reinforcement Outer Diameter

The reinforcement material is the "Muscle/Strength" to resist internal or external pressures. The three basic types of reinforcement are Spiral, Braid and Helical.



Hose Working Pressure

Should have a working pressure rating meeting or exceeding the maximum operating pressure of the system.



Hose Burst Pressure

The Burst Pressure for a hydraulic hose is that the maximum pressure before a particular hose will generally explode or have a rupture in it.



Wall Thickness

Measured in millimeters (mm)



Bending Radius

Is the smallest arc that the hose can be bent before its life is greatly reduced. Exceeding the bend radius can cause kinking, inner tube washout and excessive stress on reinforcement



Vacuum Rating

Measured in PSI and Bar
1 Bar=14.5PSI




Theoretical Weight

Provided by the foot for instances where it is a critical parameter in the design of the system.



Hydraulic Hoses

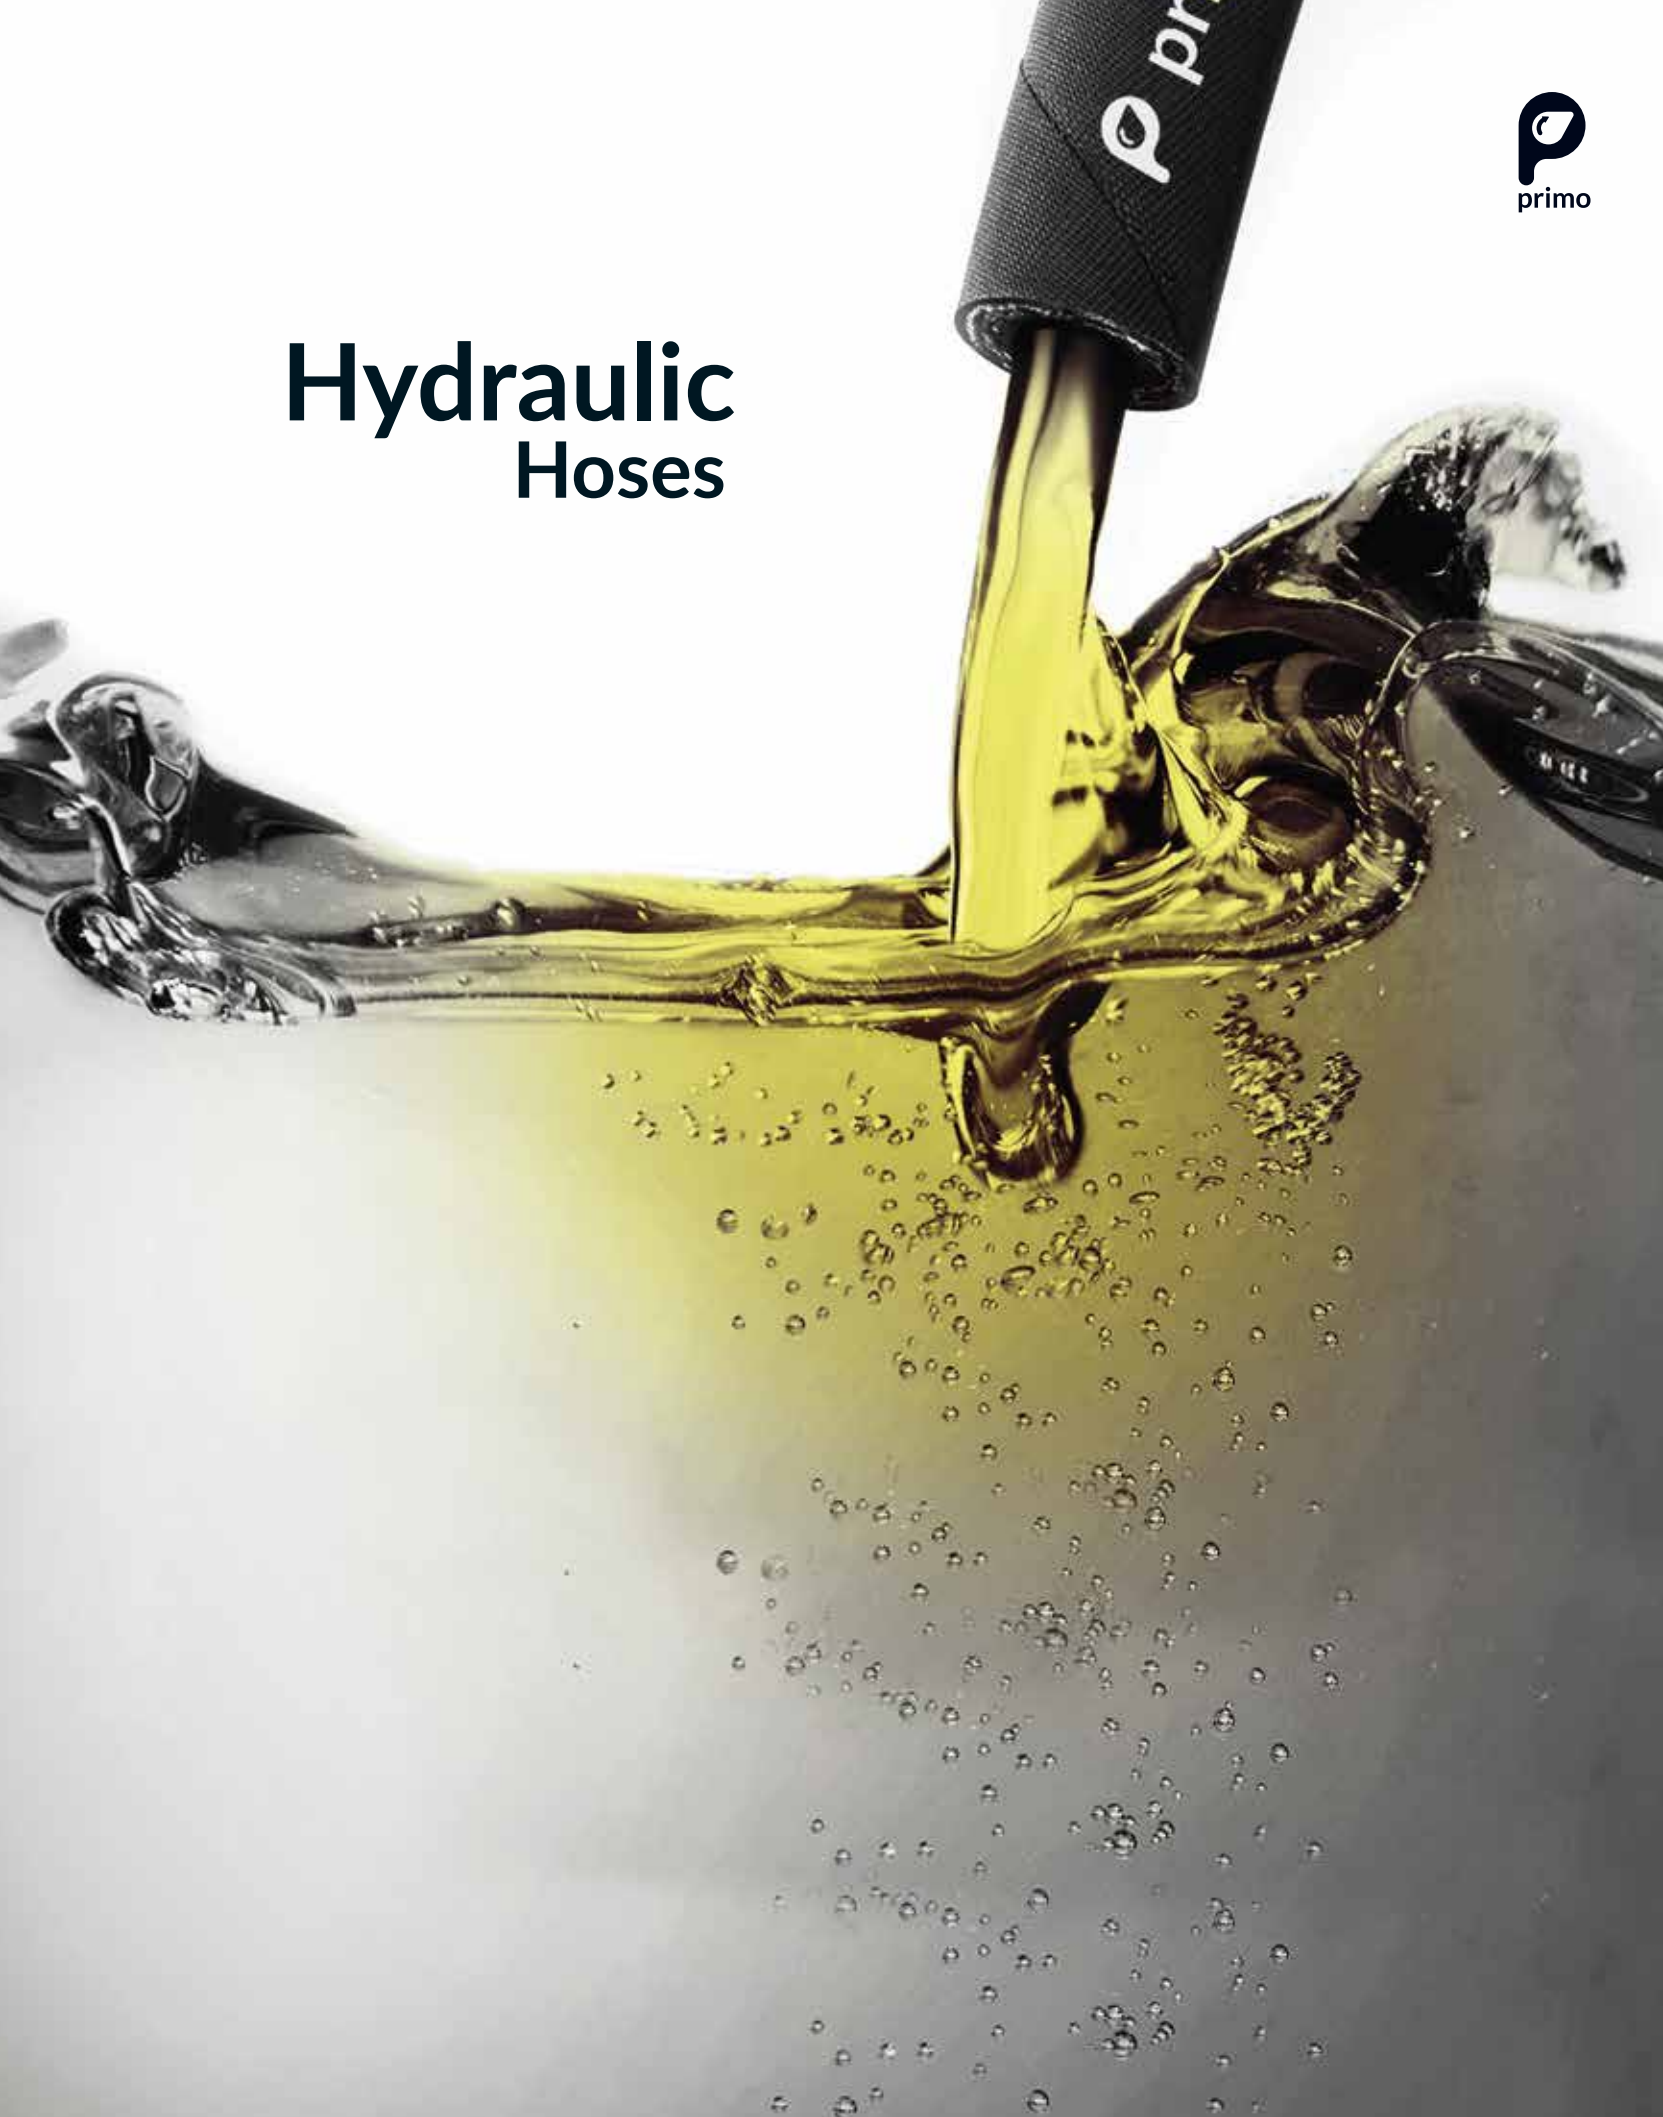

UnoForza





EN 853 1SN - SAE 100 R1 AT

- APPLICATION** : Low-medium pressure lines, including mobile, machine tools, agricultural applications using petroleum or water-based hydraulic fluids
- SPECIFICATIONS** : EN 853 1SN - SAE 100 R1 AT - ISO 1436 1SN / R1 AT
- TEMPERATURE** : -40°F to +212°F (-40°C to +100°C)
- TUBE** : Oil resistant synthetic rubber
- REINFORCEMENT** : One high tensile steel wire braid
- COVER** : Synthetic rubber with high abrasion, ozone and weather resistance. Fire resistant with MSHA approval
- FEATURES** : Extreme Abrasion resistant UHMWPE Cover – High temperature (up to 200°C) – Low Temperature (down to -50°C)

ITEM CODE	ID			ROD		OD		MAX WP		MIN BP		BR	W
	DASH	DN	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	MM	KG/M
PR-00-R1-04	-4	6	1/4"	11.2	0.44	13.2	0.52	225	3260	900	13050	100	0.23
PR-00-R1-05	-5	8	5/16"	12.8	0.50	14.8	0.58	215	3110	850	12320	115	0.27
PR-00-R1-06	-6	10	3/8"	15.1	0.59	17.1	0.67	180	2610	720	10440	125	0.34
PR-00-R1-08	-8	12	1/2"	18.1	0.71	20.1	0.79	160	2320	640	9280	180	0.42
PR-00-R1-10	-10	16	5/8"	21.3	0.84	23.3	0.92	130	1880	520	7540	200	0.51
PR-00-R1-12	-12	19	3/4"	25.3	1.00	27.3	1.07	105	1520	420	6090	240	0.63
PR-00-R1-16	-16	25	1"	33.1	1.30	35.1	1.38	88	1270	350	5070	300	0.95
PR-00-R1-24	-24	38	1 1/2"	47.0	1.85	49.7	1.96	50	725	200	2900	500	1.6
PR-00-R1-32	-32	51	2"	60.4	2.38	63.1	2.48	40	580	160	2320	630	2.2

Layline Sample

		1/4"	(6.4mm)	EN 853-SAE 100R1AT Flame Resistant	225 Bar	3260 Psi
-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------	------	---------	---------------------------------------	---------	----------



DuoForza

EN 853 2SN - SAE 100 R2 AT

APPLICATION : Medium-high pressure lines, including construction, machine tools, agricultural applications using petroleum or water-based hydraulic fluids

SPECIFICATIONS : EN 853 2SN - SAE 100 R2 AT - ISO 1436 - 1 2SN

TEMPERATURE : -40°F to +212°F (-40°C to +100°C)

TUBE : Oil resistant synthetic rubber



REINFORCEMENT : Two high tensile steel wire braids

COVER : Synthetic rubber with high abrasion, ozone and weather resistance. Fire resistant with MSHA approval

FEATURES : Extreme Abrasion resistant UHMWPE Cover – High temperature (up to 200°C) – Low Temperature (down to -50°C)

ITEM CODE	ID			ROD		OD		MAX WP		MIN BP		BR	W
	DASH	DN	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	MM	KG/M
PR-00-R2-04	-4	6	1/4"	12.7	0.50	14.7	0.58	400	5800	1600	23200	100	0.34
PR-00-R2-05	-5	8	5/16"	14.3	0.56	16.3	0.64	350	5070	1400	20300	115	0.39
PR-00-R2-06	-6	10	3/8"	16.7	0.66	18.7	0.74	330	4780	1320	19140	125	0.49
PR-00-R2-08	-8	12	1/2"	19.8	0.78	21.8	0.86	275	4000	1100	15950	180	0.59
PR-00-R2-10	-10	16	5/8"	23.0	0.91	25.0	0.98	250	3600	1000	14500	205	0.71
PR-00-R2-12	-12	19	3/4"	27.0	1.06	29.0	1.14	215	3125	860	12470	240	0.89
PR-00-R2-16	-16	25	1"	34.8	1.37	36.8	1.45	165	2400	660	9570	300	1.37
PR-00-R2-32	-32	51	2"	63.5	2.50	66.2	2.61	80	1160	320	4640	630	2.70

Layline Sample










 1/4" (6.4mm) EN 853-SAE 100R2AT Flame Resistant 400 Bar 5800 Psi

QuattroSpir




EN 856 4SP - SAE R9

- APPLICATION** : Very high-pressure applications used for petroleum based hydraulic fluids
- SPECIFICATIONS** : EN 856 4SP - SAE R9 – ISO 3862-1 4SP – MT / T98 4SP
- TEMPERATURE** : -40°F to +212°F (-40°C to +100°C)
- TUBE** : Oil resistant synthetic rubber
- REINFORCEMENT** : Four high tensile steel spiral
- COVER** : Synthetic rubber with high abrasion, ozone and weather resistance. Fire resistant with MSHA approval
- FEATURES** : Extreme Abrasion resistant UHMWPE Cover – High temperature (up to 200°C) – Low Temperature (down to -50°C)

ITEM CODE	 ID			 ROD		 OD		 MAX WP		 MIN BP		 BR	 W
	DASH	DN	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	MM	KG/M
PR-00-4SP-04	-4	6	1/4"	14.7	0.58	17.6	0.69	500	7250	1800	26100	125	0.59
PR-00-4SP-06	-6	10	3/8"	17.6	0.69	21.0	0.83	460	6650	1780	25810	180	0.78
PR-00-4SP-08	-8	12	1/2"	20.3	0.80	24.2	0.96	415	6010	1660	24070	230	0.89
PR-00-4SP-10	-10	16	5/8"	23.8	0.94	27.6	1.09	400	5800	1400	20300	250	1.11

Impulse tested over 1,000,000 cycles without leakage

Layline Sample



 1/2" (12.8mm)
 EN 856-SAE R9
Flame Resistant
415 Bar
6010 Psi



QuattroSpir



EN 856 4SH - SAE R9

- APPLICATION** : Very high-pressure applications used for petroleum based hydraulic fluids
- SPECIFICATIONS** : EN 856 4SH - SAE R9 – ISO 3862-1 4SH – MT / T98 4SPH
- TEMPERATURE** : -40°F to +212°F (-40°C to +100°C)
- TUBE** : Oil resistant synthetic rubber
- REINFORCEMENT** : Four high tensile steel spiral
- COVER** : Synthetic rubber with high abrasion, ozone and weather resistance. Fire resistant with MSHA approval
- FEATURES** : Extreme Abrasion resistant UHMWPE Cover – High temperature (up to 200°C) – Low Temperature (down to -50°C)

ITEM CODE	ID			ROD		OD		MAX WP		MIN BP		BR	W
	DASH	DN	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	MM	KG/M
PR-00-4SH-12	-12	19	3/4"	28.2	1.11	31.9	1.26	420	6090	1680	24360	280	1.55
PR-00-4SH-16	-16	25	1"	35.1	1.38	38.1	1.50	380	5510	1520	22040	340	2.00
PR-00-4SH-20	-20	31	1 ¼"	42.2	1.66	45.0	1.77	350	5100	1300	18855	460	2.46
PR-00-4SH-24	-24	38	1 ½"	49.1	1.93	53.1	2.09	300	4350	1160	16820	560	3.36

Impulse tested over 1,000,000 cycles without leakage

Layline Sample



3/4" (19mm)
EN 856-SAE R9 Flame Resistant
420 Bar
6090 Psi

UrOptimo

EN 854 - SAE 100 R6



- APPLICATION : Petroleum based hydraulic fluids
- SPECIFICATIONS : EN 854 1TE - SAE 100 R6
- TEMPERATURE : -40°F to +212°F (-40°C to +100°C)
- TUBE : Oil resistant synthetic rubber
- REINFORCEMENT : One high tensile textile braid
- COVER : Synthetic rubber with high abrasion, ozone and weather resistance

ITEM CODE	ID			OD		MAX WP		MIN BP		BR	W
	DASH	DN	INCH	MM	INCH	BAR	PSI	BAR	PSI	MM	KG/M
PR-00-R6-04	-4	6	1/4"	12.3	0.48	28	406	110	1595	65	0.17
PR-00-R6-05	-5	8	5/16"	13.9	0.55	28	406	110	1595	75	0.20
PR-00-R6-06	-6	10	3/8"	15.5	0.61	28	406	110	1595	75	0.28
PR-00-R6-08	-8	12	1/2"	19.5	0.77	28	406	110	1595	100	0.40
PR-00-R6-10	-10	16	5/8"	22.6	0.89	24	348	97	1406	125	0.45
PR-00-R6-12	-12	19	3/4"	25.8	1.02	21	305	83	1204	150	0.57
PR-00-R6-16	-16	25	1"	33.2	1.31	20	290	83	1204	150	0.57

Layline Sample



1/4"
(6.4mm)
EN 854-SAE 100R6
28 Bar
406 Psi



Industrial Hoses

AQUAFORZA 10

Water Suction & Discharge Hose



- APPLICATION** : Water suction and discharge in industrial and construction services
- TEMPERATURE** : -13°F to +158°F (-25°C to +70°C)
- REINFORCEMENT** : High tensile synthetic textile and steel helix wire
- COVER** : Abrasion and weather resistant synthetic rubber
- TUBE** : Natural and Synthetic rubber

ITEM CODE	ID		OD	MAX WP		MIN BP		VACUUM
	INCH	MM	MM	BAR	PSI	BAR	PSI	BAR
PR-00-AQ10-16	1"	25.4	36	10	145	30	435	0.8
PR-00-AQ10-20	1 ¼"	31.8	44	10	145	30	435	0.8
PR-00-AQ10-24	1 ½"	38.1	51	10	145	30	435	0.8
PR-00-AQ10-32	2"	50.8	64	10	145	30	435	0.8
PR-00-AQ10-40	2 ½"	63.5	77	10	145	30	435	0.8
PR-00-AQ10-48	3"	76.2	90	10	145	30	435	0.8
PR-00-AQ10-64	4"	101.6	118	10	145	30	435	0.8
PR-00-AQ10-96	6"	152.4	170	10	145	30	435	0.8
PR-00-AQ10-128	8"	203.2	224	10	145	30	435	0.8
PR-00-AQ10-160	10"	254	276	10	145	30	435	0.8
PR-00-AQ10-192	12"	304	326	10	145	30	435	0.8

Layline Sample




primo **AQUAFORZA 10** WATER S / D HOSE 4" W.P 10 BAR (145 PSI) ➡➡➡



IARIAFORZA 20I

Air Hose

- APPLICATION** : Medium-heavy duty service for air and pneumatic tools specially in mines, quarries and constructions
- TEMPERATURE** : -13°F to +158°F (-25°C to +70°C)
- REINFORCEMENT** : High tensile synthetic textile
- COVER** : Abrasion, ozone and weather resistant smooth natural and synthetic rubber
- TUBE** : Oil-mist resistant natural and synthetic rubber

ITEM CODE	ID 		OD 	MAX WP 		MIN BP 	
	INCH	MM	MM	BAR	PSI	BAR	PSI
PR-00-AR20-04	1/4"	6.4	13	20	300	60	900
PR-00-AR20-05	5/16"	7.9	15	20	300	60	900
PR-00-AR20-06	3/8"	9.5	17	20	300	60	900
PR-00-AR20-08	1/2"	12.7	23	20	300	60	900
PR-00-AR20-10	5/8"	15.9	26	20	300	60	900
PR-00-AR20-12	3/4"	19.1	30	20	300	60	900
PR-00-AR20-16	1"	25.4	37	20	300	60	900
PR-00-AR20-20	1 ¼"	31.8	46	20	300	60	900
PR-00-AR20-24	1 ½"	38.1	52	20	300	60	900
PR-00-AR20-32	2"	50.8	68	20	300	60	900
PR-00-AR20-40	2 ½"	63.5	80	20	300	60	900
PR-00-AR20-48	3"	76.2	92	20	300	60	900
PR-00-AR20-64	4"	101.6	120	20	300	60	900

Layline Sample


IARIAFORZA 20I
 AIR HOSE 3" W.P 20 BAR (300 PSI) B.P 60 BAR (900 PSI)

OLIOFORZA 10

Oil Suction & Discharge Hose








APPLICATION : For delivery of petroleum products with aromatic content up to 50%

TEMPERATURE : -31°F to +158°F (-35°C to +70°C)

REINFORCEMENT : High tensile synthetic textile and anti-static copper wire

COVER : Abrasion, ozone, weather and oil resistant special synthetic rubber

TUBE : Oil and petrol resistant, black NBR

ITEM CODE	ID 		OD 	MAX WP 		BR 		VACUUM 
	INCH	MM	MM	BAR	PSI	INCH	MM	BAR
PR-00-OL10-16	1"	25.4	37	10	145	6	152	0.8
PR-00-OL10-20	1 1/4"	31.8	44	10	145	8	200	0.8
PR-00-OL10-24	1 1/2"	38.1	51	10	145	9	230	0.8
PR-00-OL10-32	2"	50.8	64	10	145	10	254	0.8
PR-00-OL10-48	3"	76.2	91	10	145	18	460	0.8
PR-00-OL10-64	4"	101.6	120	10	145	24	610	0.8

Layline Sample

 **OLIOFORZA 10** OIL S / D HOSE 2" W.P 10 BAR (145 PSI) 



PrimaCor

PVC Lay Flat Hose

APPLICATION : Irrigation, construction, industrial, agricultural, mining, portable hydrant, relay supply line, quarry

TEMPERATURE : -5°F to +170°F (-20°C to +76°C)

CONSTRUCTION : Medium: Features a balanced polyester yarn spiral wrap, longitudinal strength member and homogeneous PVC tube and cover to prevent separation.




Heavy: Premium quality PVC tube and cover, reinforced with two spiral plies and longitudinal synthetic cords.

FEATURES : Medium: Smooth tube to provide low friction loss, with Ultraviolet inhibitors to reduce aging.

Heavy: MSHA accepted – use as a water hose in underground mining applications.

Provides higher working pressure and resist kinking and twisting.

MEDIUM DUTY

ITEM CODE	ID 		MAX WP 		MIN BP 	
	INCH	MM	BAR	PSI	BAR	PSI
PR-00-LF4-48	3"	76	4	58	12	174
PR-00-LF4-64	4"	102	4	58	12	174
PR-00-LF4-96	6"	153	4	58	12	174
PR-00-LF4-128	8"	203	4	58	12	174
PR-00-LF4-160	10"	254	4	58	12	174
PR-00-LF4-192	12"	305	4	58	12	174

HEAVY DUTY

PR-00-LF8-128	8"	203	8	116	24	348
---------------	----	-----	---	-----	----	-----

Layline Sample








PrimeFlex

PVC Suction Hose



- APPLICATION** : Suction and delivery of water, salt water, light chemicals, liquids etc. in agricultural, industrial applications , constructions, sewer purging, sludge, slurries, waste matter, sand and gravel, etc.
- TEMPERATURE** : -40°F to +122°F (-40°C to +50°C)
- CONSTRUCTION** : Strong, flexible and smooth special superelastic material, shock resistant PVC spiral, crushing, chemical agents, abrasion and weather resistant, corrugated sliding outside

ITEM CODE	ID 		OD 	WT 	MAX WP 		BR 
	INCH	MM	MM	MM	BAR	PSI	MM
PR-00-PF-16	1"	25.4 ± 0.5	29.4±0.5	2.0	5.0	75	70
PR-00-PF-24	1 ½"	38.1 ± 0.5	44.1±0.5	3.0	5.0	75	110
PR-00-PF-32	2"	50.8 ± 1.0	57.8±1.0	3.5	5.0	75	150
PR-00-PF-40	2 ½"	63.5 ± 1.0	70.5±1.0	3.5	4.0	60	180
PR-00-PF-48	3"	76.2 ± 1.0	84.2±1.0	4.0	4.0	60	220
PR-00-PF-64	4"	101.6 ± 1.5	111.6±1.5	5.0	4.0	60	330
PR-00-PF-96	6"	152.4 ± 1.5	166.4±1.5	7.0	3.0	45	700

Layline Sample









Primo

PVC Garden Hose

- APPLICATION** : Irrigation and washing in parks, car spray washing, factories, gardening
- TEMPERATURE** : +20°F to +150°F (-6°C to +66°C)
- CONSTRUCTION** : Outside and inside layers are made of PVC and the middle reinforcement layer is high tensile and long lasting synthetic fiber or polyurethane
- FEATURES** : Flexible, elastic, durable, light weight with excellent adaptability. Excellent weather resistance and high pressure tolerance.

ITEM CODE	 ID		 OD	 MAX WP		 MIN BP	
	INCH	MM	MM	BAR	PSI	BAR	PSI
PR-00-PGH-08	1/2"	12	15.4	6	87	18	261.0
PR-00-PGH-12	3/4"	19	23	5	73	15	217.5
PR-00-PGH-16	1"	25	30	3	44	9	130.5

Layline Sample



Primo

PVC Steel Wire Hose



- APPLICATION** : Suction and discharge of water, oil and powder in the factories, agriculture, engineering, foodstuffs
- TEMPERATURE** : +15°F to +160°F (-9°C to +71°C)
- CONSTRUCTION** : Tube and cover – PVC
- REINFORCEMENT** : Steel helical wire
- FEATURES** : Good adaptability to hard weather conditions and vacuum pressure. Light transparent with small bending radius

ITEM CODE	ID		OD	VACUUM		MAX WP		MIN BP	
	INCH	MM	MM	BAR	PSI	BAR	PSI	BAR	PSI
PR-00-PSWH-08	1/2"	12	18	-1	-15	10	145	30	435
PR-00-PSWH-12	3/4"	20	24.5	-1	-15	8	116	20	290
PR-00-PSWH-16	1"	25	32	-1	-15	7	102	20	290
PR-00-PSWH-20	1 ¼"	32	41	-1	-15	7	102	20	290
PR-00-PSWH-24	1 ½"	38	45	-1	-15	6	87	18	261
PR-00-PSWH-32	2"	50	58.2	-1	-15	5	73	14	203
PR-00-PSWH-40	2 ½"	64	72	-1	-15	4	58	10	145
PR-00-PSWH-48	3"	75	84	-1	-15	4	58	10	145
PR-00-PSWH-96	6"	152	168	-1	-15	3	44	10	145

Layline Sample









Primo

PVC Reinforced Hose

- APPLICATION** : Conveying water, oil, gas under normal working conditions in the factory, farm, ship, building and family
- TEMPERATURE** : +15°F to +150°F (-9°C to +65°C)
- CONSTRUCTION** : Tube and cover – PVC
- REINFORCEMENT** : High tensile polyester fiber braiding
- FEATURES** : Flexible, transparent, durable, non-toxic, odorless and anti-erosion. Adaptable to high pressure condition

ITEM CODE	 ID		 OD	 MAX WP		 MIN BP	
	INCH	MM	MM	BAR	PSI	BAR	PSI
PR-00-PFRH-04	1/4"	6	10	10	145	30	435
PR-00-PFRH-08	1/2"	12	16	7	102	21	305
PR-00-PFRH-12	3/4"	19	23	4	58	12	174
PR-00-PFRH-16	1"	25	30	4	58	12	174
PR-00-PFRH-24	1 ½"	38	45	4	58	12	174
PR-00-PFRH-32	2"	50	58	3	44	9	131

Layline Sample







Primo

PVC Clear Hose



- APPLICATION** : Pharmaceutical, medical, refrigeration, water and fluid lines, air and gas lines, pump feed and discharge.
- TEMPERATURE** : -41°F to +175°F (-40°C to +80°C)
- CONSTRUCTION** : Tube – Polyvinyl Chloride (PVC)
Hardness – Durometer 83 ± 3 Shore A
- FEATURES** : Light weight yet tough and abrasion resistant.
As flexible as rubber and made from non-toxic material

ITEM CODE	ID 		OD 	MAX WP 		MIN BP 	
	INCH	MM	MM	BAR	PSI	BAR	PSI
PR-00-PCH-03	3/16"	5	8	1.5	21.75	4.5	65.3
PR-00-PCH-04	1/4"	6	8	1.5	21.75	4.5	65.3
PR-00-PCH-06	3/8"	10	12	1.5	21.75	4.5	65.3
PR-00-PCH-08	1/2"	12	15	1.0	14.5	3.0	43.5
PR-00-PCH-16	1"	25	30	1.0	14.5	3.0	43.5

Layline Sample











Primo

Nylon Hose

- APPLICATION** : Transport pressurized air to pneumatic actuators, tools and other devices
- TEMPERATURE** : -60°F to +200°F (-51°C to +93°C)
- CONSTRUCTION** : Tube – Nylon 12
Hardness – Shore D 70
- FEATURES** : High working pressure and temperature/chemical resistance.
Very low moisture absorption rate

ITEM CODE	 ID	 OD	 WT	 MAX WP		 MIN BP	
	MM/INCH	MM	MM	BAR	PSI	BAR	PSI
PR-00-NH-4MMX6MM	4	6	1.00	20	290	80	1160
PR-00-NH-6MMX8MM	6	8	1.00	14	207	57	827
PR-00-NH-8MMX10MM	8	10	1.00	11	160	44	638
PR-00-NH-9MMX12MM	9	12	1.50	14	207	57	827
PR-00-NH-11MMX14MM	11	14	1.50	12	147	48	696
PR-00-NH-12MMX15MM	12	15	1.50	11	160	44	638
PR-00-NH-06	3/8"	-	1.50	12	171	47	682
PR-00-NH-08	1/2"	-	1.50	7	106	29	421

Layline Sample








Primo

PU Hose



- APPLICATION** : Transport pressurized air to pneumatic actuators, tools and other devices
- TEMPERATURE** : -41°F to +175°F (-40°C to +80°C)
- CONSTRUCTION** : Tube – Polyurethane (PU)
Hardness – Shore A 98
- FEATURES** : Strong, flexible and kink resistant.
UV Stabilized tubing is excellent for outdoor use.

ITEM CODE	 ID	 OD	 MAX WP		 MIN BP		 BR
	MM/INCH	MM	BAR	PSI	BAR	PSI	MM
PR-00-PUH-4MMX6MM	4	6	8	116	24	348	15
PR-00-PUH-6MMX8MM	6	8	6	87	18	261	23
PR-00-PUH-7MMX10MM	7	10	8	116	24	348	25
PR-00-PUH-9MMX12MM	9	12	6	87	18	261	40
PR-00-PUH-10MMX14MM	10	14	8	116	24	348	45
PR-00-PUH-12MMX16MM	12	16	8	116	24	348	70
PR-00-PUH-06	3/8"	-	6	87	18	261	80
PR-00-PUH-08	1/2"	-	8	116	24	348	25





Layline Sample



Primo

PU Coiled Hose

- APPLICATION** : Pharmaceutical, medical, refrigeration, water and fluid lines, air and gas lines.
Pump feed and discharge
- TEMPERATURE** : -41°F to +175°F (-40°C to +80°C)
- CONSTRUCTION** : Tube – Polyvinyl Chloride
Hardness – Durometer 83 ± 3 Shore A
- FEATURES** : Light weight yet tough and abrasion resistant.
As flexible as rubber and made from non-toxic material

ITEM CODE	 ID	 OD	 MAX WP		 MIN BP	
	MM	MM	BAR	PSI	BAR	PSI
PR-00-PUCH-8MMX12MM	8	12	8	116	24	348
PR-00-PUCH-10MMX14MM	10	14	8	116	24	348
PR-00-PUCH-12MMX16MM	12	16	8	116	24	348

Layline Sample





Notes

A series of horizontal dotted lines for writing notes, spanning the width of the page.



Notes

A series of horizontal dotted lines for writing notes.

Notes

A series of horizontal dotted lines for writing notes, spanning the width of the page.



Notes

A series of horizontal dotted lines for writing notes.